



# SILO OUT-FEEDER


The key solution for silo out-feeding

Weiss A/S offers a complete product range with self-designed and produced silo outfeeding systems.

- NFU outfeeders are designed for automatic emptying of the circular silos with flat bottom
- NFF outfeeders are designed for automatic emptying of the silos with conical bottom

Depending on the type of a silo, the outfeeder can be :

- installed in the silo
- built into a silo support
- built into silos with hidden bottoms
- built into a silos on concrete foundation

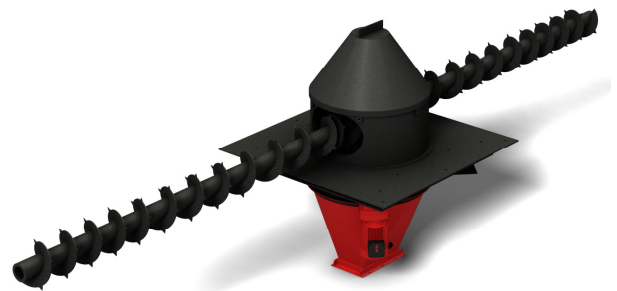




This outfeeding system can be equipped with more distribution lines to supply individual and concurrent fuel usage points.

We reserve our right to alter the specifications at any time without prior notice.



# NFU OUT-FEEDER

The key solution for silo out-feeding

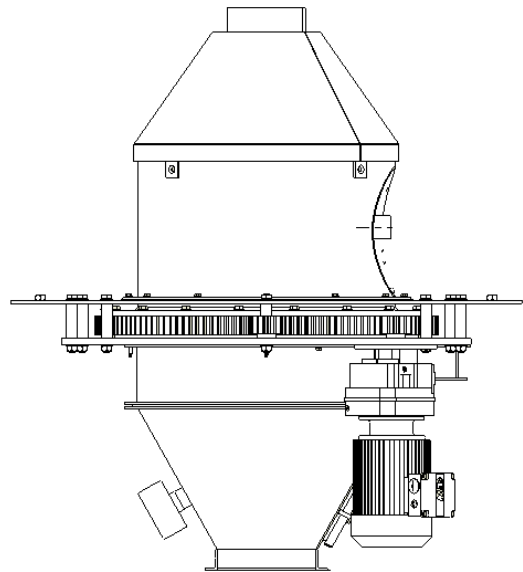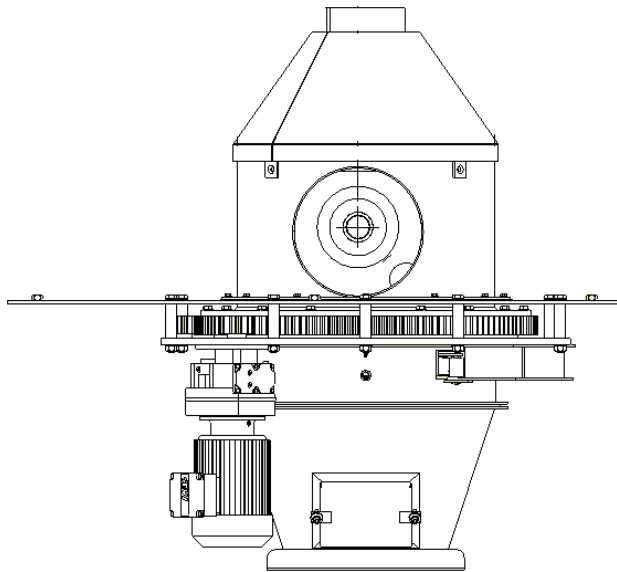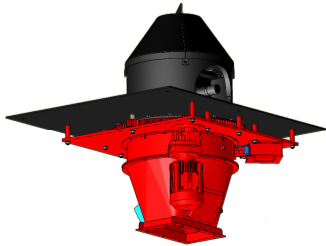

| Technical data   |           |          |           |
|--|-----------|----------|-----------|
| Type   | NFU 600   | NFU 800  | NFU 800HD |
| Capacity (m <sup>3</sup> /h)                           | 1,9 - 7,9 | 20-25    | 60-100    |
| Main motor for screw (kW)                              | 0,37-1,5  | 4        | 5,5       |
| Weight (kg/ with screw)                                | 30        | 38       | 38        |
| Motor torque (kW)                                      | 0,55      | 2x 0,55  | 2x0,55    |
| Material dimensions                                    | 13x13x13  | 13x13x13 | 30x30x10  |
| Material max. moisture content of the specific gravity | 35%       | 35%      | 35%       |

We reserve our right to alter the specifications at any time without prior notice.